


4V、3V400 Series Solenoid Valve,4A、3A400 Series Pneumatic Control Valve

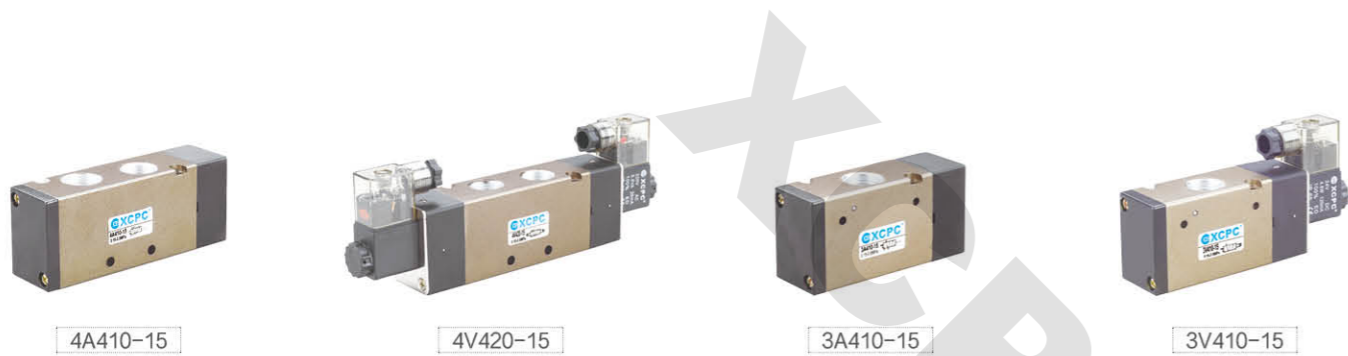

Ordering Code

4V	4	10	10	AC220V		
Specification Code 4V:Two(Three)-position Five-way Solenoid Valve 4A:Two(Three)-position Five-way Pneumatic control Valve 3V:Two-position Three-way Solenoid Valve 3A:Two-position Three-way Pneumatic Control Valve	Series Code 400 Series	Coil and Places 10:Single-head Double-position 20:Double-head Double-position 30C:Double-head Three-position Close Type 30E:Double-head Three-position Exhaust Type 30P:Double-head Three-position Pressure Type	Port Size 10:G3/8" 15:G1/2"	Port connection and Initial State NC:Two-position Three-way Normal Close Type NO:Two-position Three-way Normal Open Type	Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	Wiring Form Blank:Standard Connector LD:Brown With Lighting Connector LD1:White With Lighting Connector W:Lead Wire Type

Specifcation

Model	4V410-15	4V420-15	4V430C-15	4V430E-15	4V430P-15
Position and Way NO.	Two-position Five-way		Three-position Five-way		
Effective Sectional Area	50mm ² (CV=2.79)		30mm ² (CV=1.68)		
Model	3V410-15	3V420-15	3A410-15	3A420-15	
Position and Way NO.	Two-position Three-way				
Effective Section Area	50mm ² (CV=2.79)				
Joint Pipe Bore	Air Inlet=Air Outlet=Exhaust=G1/2"				
Working Medium	40 Micron Filtered Air				
Motion Pattern	Inner Guide Type				
Working-pressure	0.15~0.8 M Pa				
Max. Pressure Resistance	1.2MPa				
Operating Temperature	5~50 C				
Voltage Range	±10%				
Power Consumption	AC: 4.5VA DC: 3W				
Insulation & Protection Class	F Class. IP65				
Wiring Form	Lead Wire or Connector type				
Highest Action Frequency	5 Cycle / Sec				
Shortest Excitation Time	0.05 Second				

4V、3V400 Series Solenoid Valve,4A、3A400 Series Pneumatic Control Valve

Overall Dimensions

