


4F、FV Series Foot Valve

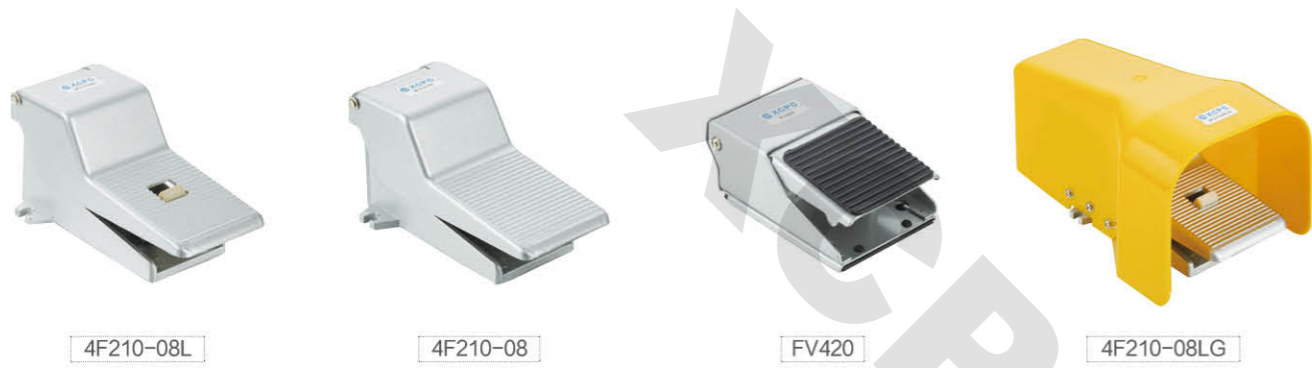

Ordering Code

<b>4F</b>	—	<b>2</b>		<b>10</b>	—	<b>08</b>	—	<input type="checkbox"/>		<b>FV</b>	—	<b>320</b>
<b>Specification Code</b>		<b>Series Code</b>		<b>Number of Places</b>		<b>Port Size</b>		<b>Type Code</b>		<b>Specification Code</b>		<b>Position and way No</b>
4F:Two-position Five-way Foot Valve		2:200 Series		10:Single-head Double-position		08:G1/4"		Blank:Standard Type L:With Lock G:With Cover LG:With Lock And Cover		FV:Foot Valve		320:Two-position Three-way 420:Two-position Four-way

Specification

Model	4F210-06	4F210-08L	4F210-08G	4F210-08LG	FV420	FV320
Working Medium	40 Micron Filtered Air					
Position and Way Number	Two-position Five-way				Two-position Four-way	Two-position Three-way
Motion Patten	Direct Drive Type					
Port Size	Air Inlet=Air Outlet=Exhaust=G1/4"				Air Inlet=Air Outlet=G1/4" Exhaust=G1/8"	
Working-pressure Range	0.15~0.9MPa					
Operating Temperature Range	0~60°C					

Overall Dimensions



4F、FV Series Foot Valve

Overall Dimensions

