

MSV Series Mechanical Valve



MSV86522-EB MSV86522-PB MSV86522-TB MSV86522-LB MSV86522-PP MSV86522-PPL MSV86522-R

Ordering Code


MSV **98** **32** **1** **R**

Specification Code MSV Mechanical Valve 86 Series
Series Code 98 Series
Position and Way No 32: Two-position Three-way, 52: Two-position Five-way
Port Size 1: G1/8", 2: G1/4"
Button Type Blank: Normal Type, R: Roller Type, TB: Selective Knob, LB: Strengthened Knob, PB: Large Round Button, PP: Plat Round Button, PPL: Convex Round Button, EB: With Lock Button

Specification

Model	MSV86321	MSV86522	MSV98322
Working Medium	40 Micron Filtered Air		
Position and Way No.	Two-position Three-way	Two-position Five-way	Two position Three-way
Effective Section Area	12mm ² (CV=0.67)	16mm ² (CV=0.89)	16mm ² (CV=0.89)
Port Size	G1/8"	G1/4"	G1/4"
Pressure Range	0~0.8Mpa		
Temperature Range	0~60℃		

Overall Dimensions

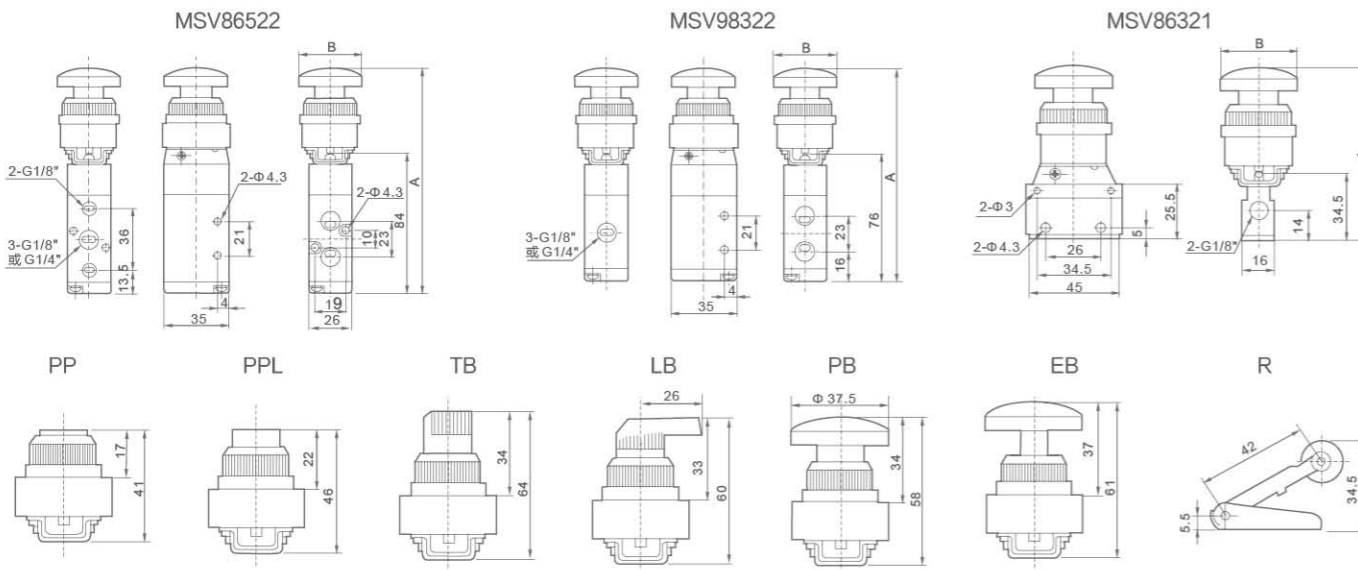

Dimension Sheet

Model	Symbol/Model	PP	PPL	LB	TB	EB	PB	R
MSV86522	A	114	119	133	136.5	134	131	107.5
	B	39.5	24.5	26.5	36.5	39.5	37.5	42.5
MSV98322	A	106	111	125	129.5	126	123	99.5
	B	39.5	24.5	26.5	36.5	39.5	37.5	42.5
MSV86321	A	66	71	85	88.5	86	83	59.5
	B	39.5	24.5	26.5	36.5	39.5	37.5	42.5

JMJ Series Mechanical Valve



JMJ-01 MJMJ-02 MJMJ-03 MJMJ-04 MJMJ-05 MJMJ-06 MJMJ-07

Ordering Code

JMJ **01**

Specification Code Joint Pipe Bore G1/4" Two-position Three-way Mechanical Valve
Button Type 01: Selective Knob, 02: Strengthened Knob, 03: With Lock Button, 04: Large Round Button, 05: Plat Round Button, 06: Convex Round Button, 07: Roller Type

Specification

Model	JMJ-01, 02, 03, 04, 05, 06, 07
Port Size	G1/4"
Working Medium	Air
Temperature Range	0~60℃
Pressure Range	0~1MPa
Effective Section Area	25mm ²
Lubrication	Not Necessary

Overall Dimensions

